
# **FLECK**

#### **RECESSED 30% TRUE, LEADED CRYSTAL STARLIGHT IP67/IP65 INDOOR/OUTDOOR**

### MINIM.IS/fleck

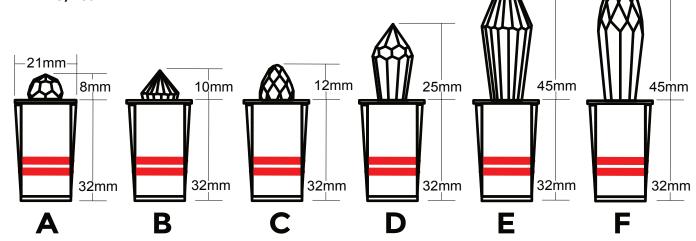

#### **SPECIFICATIONS**

MATERIAL: PRECISION, HAND-MILLED TITANIUM

CHOICE AMONG SIX 30% LEADED CRYSTAL FORMS, SUBJECT TO AVAILABILITY; DIMENSIONS +/- 2MM OPTICS:

23-INCH (58CM) DOUBLE-SHEATHED PIGTAIL PIGTAII:

CONSTANT VOLTAGE 12-VOLT DC, PARALLEL TOPOLOGY POWER REQUIREMENT: ENVIRONMENT: IP67, IP65, DAMP, WET, DRY, IC, CONCRETE, DRYWALL

WARRANTY: 5-YEAR LIMITED WARRANTY

LUMINAIRE WEIGHT: 0.1 LB (45 GRAMS)

POWER RATING: 125mA @ 12vDC = 1.5 watt

LUMEN OUTPUT: 38 LM (DELIVERED)

# HOW TO SPECIFY. LUMINAIRE EXAMPLE CODE: FL-MP-30-E-TI-TRKTRD16-PKMP-1630-DAL

PROD.	FAMILY	CCT & CRI	OPTICS °	BEZEL COLOR	TRIM KIT	POWER KIT <sup>1</sup>	DIMMING PROTOCOLS
EI	MP	27 2700°K CRI 90+	A 8MM H LEADED CRYSTAL	TI NATURAL TITANIUM	TRKTRD16 2	PKMP-0115 FOR 1 TO 15 LIGHTS	10V 0-10VDC + 10V PWM <sup>3</sup>
	1411-	30 3000° K CRI 90+		AU MATTE GOLD 3	NOKIT	PKMP-1630 FOR 16 TO 30 LIGHTS	
		35 3500° K CRI 90+	C 12MM H LEADED CRYSTAL	BK MATTE BLACK 3		NOPW NO POWER	DL2 DALI-2 + 10V PWM <sup>3</sup>
		40 4000° K CRI 90+	D 25MM H LEADED CRYSTAL				N/A NO POWER
		50 5000° K CRI 90+	E 45MM H LEADED CRYSTAL				

- 1 KIT TO POWER 1-15 LIGHTS OR 16-30 LIGHTS. DATA SHEET: https://minim.is/cutsheet/CUT-SHEET-PKMPXXXX.pdf ALL-TITANIUM CONCRETE / PLASTER TRIM KIT "BEFORE THE POUR." DATA SHEET: https://minim.is/cutsheet/CUT-SHEET-TRKTXXXX.pdf SUBJECT TO AVAILABILITY, ADDITIONAL CHARGE, AND LEAD TIMES. INCORRECT CHOICE RESULTS IN RESTOCKING FEE. 3.
- 4. CRYSTALS ARE HAND-FACETED. MAY RESULT IN MINOR, OFF-CENTER ORIENTATION. DIMENSIONS +/- 4MM.
- 5. A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANT
- 6. CRYSTALS ARE EXCEEDINGLY FRAGILE. WARRANTY DOES NOT COVER BREAKAGE IN THE FIELD.

F 45MM H LEADED CRYSTAL

## WARRANTY NOTES + DISCLAIMER

MALFUNCTION AND/OR DAMAGE TO PRODUCT DUE TO EMPLOY OF INCOMPATIBLE OR DEFECTIVE DIMMING SYSTEM / PROTOCOL, OR DUE TO DISREGARD OF INSTALLATION INSTRUCTIONS WILL NOT BE COVERED UNDER WARRANTY. CONTACT MINIMIS FOR RECOMMENDED POWER SOURCES. MAINS DIMMING WILL INVALIDATE WARRANTY.

IF FIXTURE IS TO BE INSTALLED WITH A DIMMER OR DIMMING CONTROL SYSTEM A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY. CONSULT A DIMMING SYSTEM MANUFACTURER WITH MINIMUM LOAD BEFORE INSTALLING.

MINIMIS RESERVES THE RIGHT AT ITS SOLE DISCRETION TO MAKE DESIGN CHANGES TO OUR PRODUCTS, AT ANY TIME, AND WITHOUT ADVANCE NOTICE

CONSULT US: +1 305 503 5779 or WWW.MINIM.IS/contact

**MINIMIS** 1661 WEST AVE #398002 MIAMI BEACH 33239



WWW.MINIM.IS +1 305 503 5779

