



POX

MINUSCULE UNDER-RAILING LIGHTING
AVAILABLE FOR 40MM and 50MM RAILING

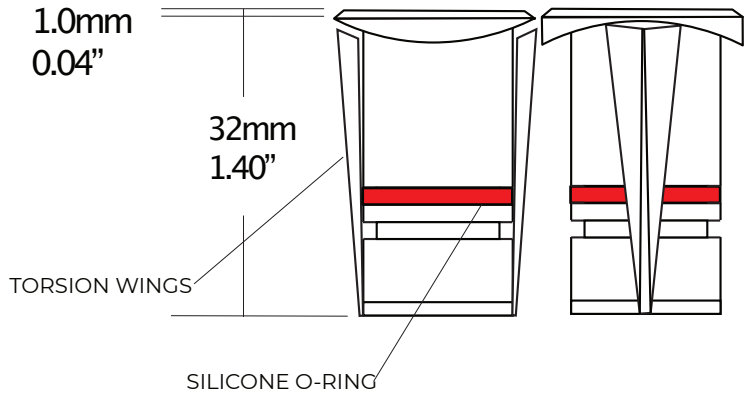

MINIM.IS/pox

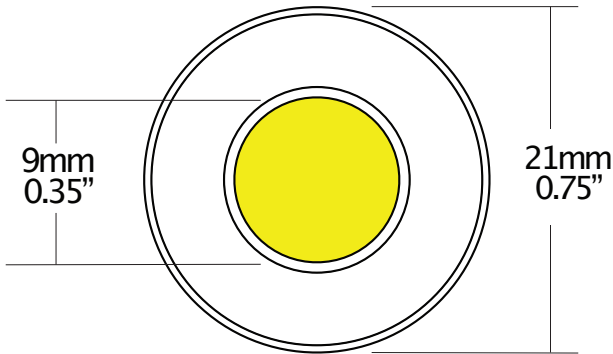


SPECIFICATIONS

MATERIAL:	PRECISION, HAND-MILLED TITANIUM	WARRANTY:	5-YEAR LIMITED WARRANTY
SECONDARY OPTICS:	PMMA LENS + SAPPHIRE CRYSTAL, OR METALLIC CUP REFLECTOR + SAPPHIRE CRYSTAL	LUMINAIRE WEIGHT:	0.1 LB (45 GRAMS)
PIGTAIL:	23-INCH (58CM) DOUBLE-SHEATHED PIGTAIL	MP FAMILY RATING:	125mA @ 12VDC = 1.5 watt
POWER REQUIREMENT:	CONSTANT VOLTAGE 12-VOLT DC, PARALLEL TOPOLOGY	LUMEN OUTPUT:	FLOOD: 112 LM (DELIVERED) SPOT: 92 LM (DELIVERED)
ENVIRONMENT:	IP67, IP65, DAMP, WET, DRY, IC, CONCRETE, DRYWALL		

HOW TO SPECIFY. LUMINAIRE EXAMPLE CODE: X5-MP-30-N-TI-LH-PKMP-0115-DL2

PROD.	FAMILY	CCT & CRI	OPTICS	BEZEL COLOR	ACCESSOR.	POWER KIT ³	POWER DIMMING PROTOCOLS ¹
X4 For 40mm Ø railing	MP	27 (2700°K CRI 90+)	FL 136° FLOOD ⁴	TI NATURAL TITAN	NO NONE	PKMP-0115 FOR 1 TO 15 LIGHTS	10V 0-10VDC + 10V PWM ²
X5 For 50mm Ø railing		30 (3000°K CRI 90+)	SP 40° SPOT ⁵	AU MATTE GOLD ²	LH HEX LOUVER ⁶	PKMP-1630 FOR 16 TO 30 LIGHTS	DL1 DALI + 10V PWM ²
		35 (3500°K CRI 90+)		BK MATTE BLACK ²	FR FROST LENS ⁶	NOPW NO POWER	DL2 DALI-2 + 10V PWM ²
		40 (4000°K CRI 90+)					N/A NO POWER
		50 (5000°K CRI 90+)					

1. A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY.
2. SUBJECT TO AVAILABILITY, ADDITIONAL CHARGE, AND LEAD TIMES. INCORRECT CHOICE RESULTS IN RESTOCKING FEE.
3. 1 KIT TO POWER 1-15 LIGHTS OR 16-30 LIGHTS. DATA SHEET: <https://minim.is/cutsheet/CUT-SHEET-PKMPXXXX.pdf>
4. PMMA + SAPPHIRE CRYSTAL LENS ASSEMBLY.
5. METALLIC CUP REFLECTOR + SAPPHIRE CRYSTAL ASSEMBLY.
6. INSTALLED AT FACTORY, AND IS NON-REMOVABLE. ADDITIONAL CHARGE APPLIES.



POWER KITS: MINIMIS RECOMMENDS THE MP SERIES POWER KIT - www.MINIM.IS/power

WARRANTY NOTES + DISCLAIMER

MALFUNCTION AND/OR DAMAGE TO PRODUCT DUE TO EMPLOY OF INCOMPATIBLE OR DEFECTIVE DIMMING SYSTEM / PROTOCOL, OR DUE TO DISREGARD OF INSTALLATION INSTRUCTIONS WILL NOT BE COVERED UNDER WARRANTY. CONTACT MINIMIS FOR RECOMMENDED POWER SOURCES. **MAINS DIMMING WILL INVALIDATE WARRANTY.**

IF FIXTURE IS TO BE INSTALLED WITH A DIMMER OR DIMMING CONTROL SYSTEM A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY. CONSULT A DIMMING SYSTEM MANUFACTURER WITH MINIMUM LOAD BEFORE INSTALLING.

MINIMIS RESERVES THE RIGHT AT ITS SOLE DISCRETION TO MAKE DESIGN CHANGES TO OUR PRODUCTS, AT ANY TIME, AND WITHOUT ADVANCE NOTICE.

CONSULT US: +1 305 503 5779 or WWW.MINIM.IS/contact

MINIMIS
1661 WEST AVE #398002
MIAMI BEACH 33239

WWW.MINIM.IS
+1 305 503 5779



MADE SOMEWHERE IN AMERICA.

COPYRIGHT MINIMIS 2023

AUG-2023