
SPECK

MINUSCULE RECESSED STAIR / PATHWAY LIGHT MINIM.IS/speck



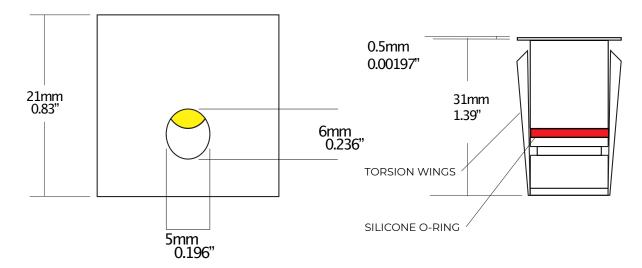

SPECIFICATIONS

MATERIAL: PRECISION, HAND-MILLED TITANIUM LUMINAIRE WEIGHT: 0.1 LB (45 GRAMS) PIGTAII: 23-INCH (58CM) DOUBLE-SHEATHED PIGTAIL DRIVE-OVER RATING: 10.500 LBS (4.775 KG) POWER REQUIREMENT: CONSTANT VOLTAGE 12-VOLT DC. PARALLEL TOPOLOGY MP FAMILY RATING: 125mA @ 12vDC = 1.5 watt ENVIRONMENT: IP67+IP65, WET, DRY, IC, CONCRETE, IN-GRADE LUMEN OUTPUT: 52 LM (DELIVERED)

WARRANTY: 5-YEAR LIMITED WARRANTY CERTIFICATIONS: UL 2108 for IC, concrete, and in-grade. IP67 and IP65, dry

HOW TO SPECIFY. LUMINAIRE EXAMPLE CODE: CK-MP-27-TI-TRKTRD16-PKMP-1630-10V

| PROD. | FAMILY | CCT & CRI | BEZEL COLOR | TRIM KIT | POWER KIT ⁴ | | POW | POWER DIMMING PROTOCOLS ¹ | |
|-------|--------|---|--|--------------------------------|--------------------------------|---|--------------------------|---|--|
| СК | MP | 27 2700° K CRI 90+) 30 (3000° K CRI 90+) 35 (3500° K CRI 90+) 40 (4000° K CRI 90+) 50 (5000° K CRI 90+) | TI NATURAL TITANIUM AU MATTE GOLD 3 BK MATTE BLACK 3 | TRKTRDI6 ² NOKIT | PKMP-0115 PKMP-1630 NOPW | FOR 1 TO 15 LIGHTS FOR 16 TO 30 LIGHTS NO POWER | 10V DL1 DL2 N/A | 0-10VDC + 10V PWM ³ DALI + 10V PWM ³ DALI-2 + 10V PWM ³ NO POWER | |

- A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY. ALL-TITANIUM CONCRETE / PLASTER TRIM KIT "BEFORE THE POUR." DATA SHEET: https://minim.is/cutsheet/CUT-SHEET-TRKTXXXX.pdf
 SUBJECT TO AVAILABILITY, ADDITIONAL CHARGE, AND LEAD TIMES. INCORRECT CHOICE RESULTS IN RESTOCKING FEE.
- 1 KIT TO POWER 1-15 LIGHTS OR 16-30 LIGHTS. DATA SHEET: https://minim.is/cutsheet/CUT-SHEET-PKMPXXXX.pdf

POWER KITS: MINIMIS RECOMMENDS THE MP SERIES POWER KIT - www.MINIM.IS/power

WARRANTY NOTES + DISCLAIMER

MALFUNCTION AND/OR DAMAGE TO PRODUCT DUE TO EMPLOY OF INCOMPATIBLE OR DEFECTIVE DIMMING SYSTEM / PROTOCOL, OR DUE TO DISREGARD OF INSTALLATION INSTRUCTIONS WILL NOT BE COVERED UNDER WARRANTY. CONTACT MINIMIS FOR RECOMMENDED POWER SOURCES. MAINS DIMMING WILL INVALIDATE WARRANTY.

IF FIXTURE IS TO BE INSTALLED WITH A DIMMER OR DIMMING CONTROL SYSTEM A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY, CONSULT A DIMMING SYSTEM MANUFACTURER WITH MINIMUM LOAD BEFORE INSTALLING.

MINIMIS RESERVES THE RIGHT AT ITS SOLE DISCRETION TO MAKE DESIGN CHANGES TO OUR PRODUCTS, AT ANY TIME, AND WITHOUT ADVANCE NOTICE.

CONSULT US: +1 305 503 5779 or WWW.MINIM.IS/contact

MINIMIS 1661 WEST AVE #398002 MIAMI BEACH 33239

COPYRIGHT MINIMIS 2023



WWW MINIM IS +1 305 503 5779