

TACK

TINY-APERTURE ALL-TITANIUM DUAL-AXIS ARTICULATING LANDSCAPE LIGHT
MINIM.IS/tack



40°
SHARP
CUTOFF
SPOT




136°
FLOOD
PMMA
LENS


SPECIFICATIONS

MATERIAL:	PRECISION, HAND-MILLED TITANIUM, REMOVABLE STAKE
SECONDARY OPTICS:	SAPPHIRE CRYSTAL WITH 40° SPOT OR 136° FLOOD + OPTIONAL COWLS
PIGTAIL:	23-INCH (58CM) DOUBLE-SHEATHED PIGTAIL
STAKE:	8" (20cm) TITANIUM STAKE (REMOVABLE)
POWER RATING	125MA, 1.5W @ 12VDC
POWER REQUIREMENT:	CONSTANT VOLTAGE 12-VOLT DC, PARALLEL TOPOLOGY
ENVIRONMENT:	IP67, WET, DRY
WARRANTY:	5-YEAR LIMITED WARRANTY
LUMINAIRE WEIGHT:	0.2 LB (45 GRAMS)
LUMEN RATINGS:	SPOT: 92 LM (DELIVERED). FLOOD: 111 LM (DELIVERED)
DIMMING PROTOCOLS:	PWM, 0-10V, DALI-1, DALI-2. NO LINE-VOLTAGE DIMMING.


OPTIONAL COWLS AND OPTICAL ACCESSORIES
FACTORY-INSTALLED. NOT SOLD SEPARATELY.



LH



FR






NC



C1



C2

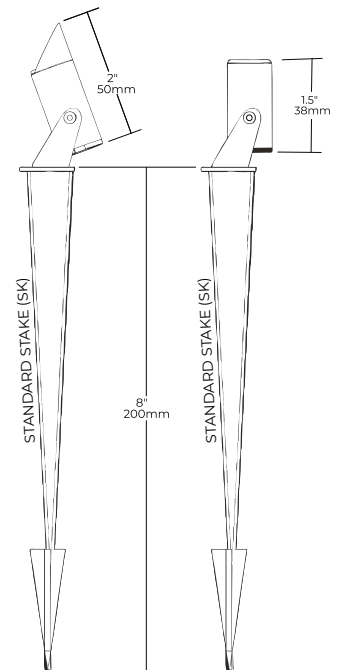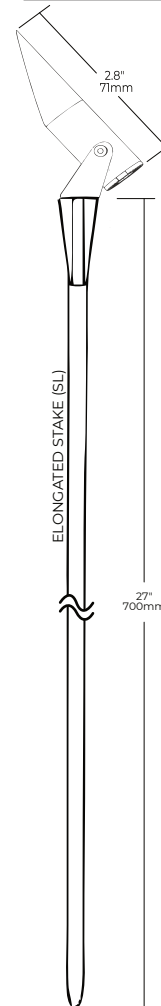

HOW TO SPECIFY. LUMINAIRE EXAMPLE CODE: TA-MP-30-SP-C2-LH-NM-BK-PKMP-0115-10V

PROD.	FAMILY	CCT & CRI	DISTRIBUTION	COWL	OPTIC ACCESSOR.	MOUNT METHOD	MATERIAL FINISH	POWER KIT ⁵	POWER KIT DIMMING PROTOCOLS ¹
TA	MP	27 (2700° CRI>90 2sMcE)	SP 40° SPOT	NC NO COWL	NO NONE	NM NONE	TI NATURAL TITANIUM	PKMP-0115 FOR 1-15 LIGHTS	10V 0-10VDC + 10V PWM ⁴
		30 (3000° CRI>90 2sMcE)	FL 136° FLOOD	C1 MED. COWL ²	LH HEX LOUVER ²	SK STAKE	BK BLACK ³	PKMP-1630 FOR 16-30 LIGHTS	DL1 DALI + 10V PWM ⁴
		35 (3500° CRI>90 2sMcE)		C2 LONG COWL ²	FR FROST LENS ²	SL LONG STAKE ³		NOPWR NO POWER KIT	DL2 DALI-2 + 10V PWM ⁴
		40 (4000° CRI>90 2sMcE)				WT WEIGHTED BASE ³			N/A NO POWER
		50 (5000° CRI>90 2sMcE)							

- A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY.
- ADDITIONAL CHARGES AND LEAD TIMES APPLY. FACTORY-INSTALLED. NOT SOLD SEPARATELY. ONLY AVAILABLE AT TIME OF PURCHASE OF LUMINAIRE.
- ADDITIONAL CHARGES AND LEAD TIMES APPLY.
- SUBJECT TO AVAILABILITY. LEAD TIMES APPLY. INCORRECT CHOICE RESULTS IN RESTOCKING FEE
- 1 KIT TO POWER 1-15 LIGHTS OR 16-30 LIGHTS. DATA SHEET: <https://minim.is/cutsheet/CUT-SHEET-PKMPXXXX.pdf>

POWER KITS: MINIMIS RECOMMENDS THE MP SERIES POWER KIT - WWW.MINIM.IS/power

WARRANTY NOTES + DISCLAIMER

MALFUNCTION AND/OR DAMAGE TO PRODUCT DUE TO EMPLOY OF INCOMPATIBLE OR DEFECTIVE DIMMING SYSTEM / PROTOCOL, OR DUE TO DISREGARD OF INSTALLATION INSTRUCTIONS WILL NOT BE COVERED UNDER WARRANTY. CONTACT MINIMIS FOR RECOMMENDED POWER SOURCES. **MAINS DIMMING WILL INVALIDATE WARRANTY.**

IF FIXTURE IS TO BE INSTALLED WITH A DIMMER OR DIMMING CONTROL SYSTEM A MINIMUM OF THREE (3) LUMINAIRES ARE REQUIRED MEET DIMMING "MINIMUM LOAD" OBLIGATIONS. DIMMING LESS THAN THREE (3) WILL INVALIDATE WARRANTY. CONSULT A DIMMING SYSTEM MANUFACTURER WITH MINIMUM LOAD BEFORE INSTALLING.

MINIMIS RESERVES THE RIGHT AT ITS SOLE DISCRETION TO MAKE DESIGN CHANGES TO OUR PRODUCTS, AT ANY TIME, AND WITHOUT ADVANCE NOTICE.

CONSULT US: +1 305 503 5779 or WWW.MINIM.IS/contact

minimis
WWW.MINIM.IS
1661 WEST AVE #398002
MIAMI BEACH 33239



WWW.MINIM.IS
+1 305 503 5779